

TILLER EXTENSIONS

Installation and Maintenance



How to install the grey pivot bearing on a wooden tiller:

- Drill a through hole $\Phi 12.5\text{mm}$ (1/2")
- Varnish the hole
- Insert the grey socket
- Secure with the 2 x N°8 screws (supplied)

How to install the grey pivot bearing on a metal or composite tiller:

- Drill a through hole $\Phi 12.5\text{mm}$ (1/2")
- From the underside of tiller drill hole $\Phi 16.5\text{mm}$ (21/32"), DO NOT DRILL THROUGH TOP SKIN/TOP WALL
- Insert the grey backing spacer tube (E-SLEEVE) this is required to support pivot bearing.
- If the tiller is in composite, protect the hole using gel-coat to avoid water penetration in fibres.
- Around the tube, the top external surface must be flush with the tiller.
- Insert the grey pivot bearing.
- Fix it with 2 x countersunk bolts M5 and M5 Nyloc nuts (supplied).

Maintenance:

Spinlock products are made from the best quality materials for durability and low maintenance in a harsh marine environment.



For reliable operation, flush your tiller extension regularly with FRESH WATER to remove salt.

DO NOT lubricate locking mechanism. Mineral oil and solvent based lubricants like "WD40" will accelerate the ageing of the plastic components and attract debris into ball lock mechanism.

NEVER SAIL WITH A DAMAGED OR BENT TILLER EXTENSION.

How to install the grey pivot bearing on a metal or composite tiller:

- Drill a through hole $\Phi 12.5\text{mm}$ (1/2")
- From the underside of tiller drill hole $\Phi 16.5\text{mm}$ (21/32"), DO NOT DRILL THROUGH TOP SKIN/TOP WALL
- Insert the grey backing spacer tube (E-SLEEVE) this is required to support pivot bearing.
- If the tiller is in composite, protect the hole using gel-coat to avoid water penetration in fibres.
- Around the tube, the top external surface must be flush with the tiller.
- Insert the grey pivot bearing.
- Fix it with 2 x countersunk bolts M5 and M5 Nyloc nuts (supplied).

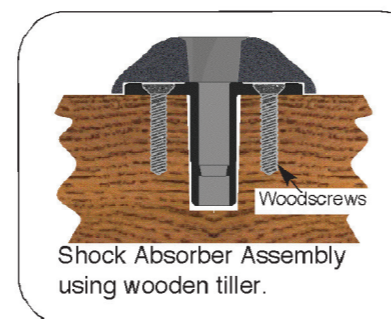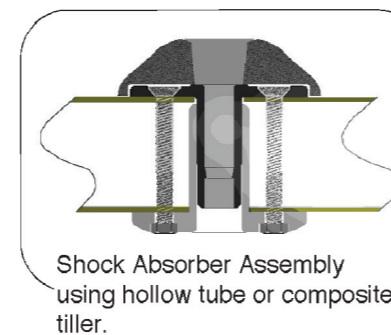

Accessories \ For EA & EJ Tiller Extensions

E-FASTPIN	Full swivel joint release pin
E-SHOCK	Shock absorber
E-CLIP	Tiller clip
E-BUTTON	Control button
E-TUBE	Insert for hollow/composite tiller
E-GRIP	Tube sleeve grip
E-JOINT	Full swivel joint with fast pin
E-SLEEVE	Full length sleeve
E-DIABOLO	Full universal joint

Customer Service

Spinlock's aftersales service is available worldwide through our distribution network. Should you need any help in obtaining spare parts, or advice with repairs, your local Spinlock expert can provide a fast and professional service.

Le service après-vente Spinlock est garanti à travers le monde grâce à notre réseau de distribution. Que vous ayez besoin d'un conseil ou de pièces détachées, contactez votre distributeur local qui vous apportera un service rapide et de qualité.

prosUPPORT@spinlock.co.uk \ www.spinlock.co.uk

Important

Spinlock Limited accept no liability whatsoever for any claim that may relate directly or indirectly to the use of this equipment for any application or loading other than advised in current product information published by Spinlock Limited.

Chacun de nos produits est destiné à un usage spécifique qui doit être conforme à nos recommandations. En case de doute vous devez solliciter un complément d'information auprès de Spinlock Limited qui ne peut en aucun cas être tenue responsable des dégâts et/ou dommages directs ou indirects survenus lors de l'utilisation de ses produits.